



PURIFIER ENVIRONMENTAL AIR PFUVC PG

Air treatment

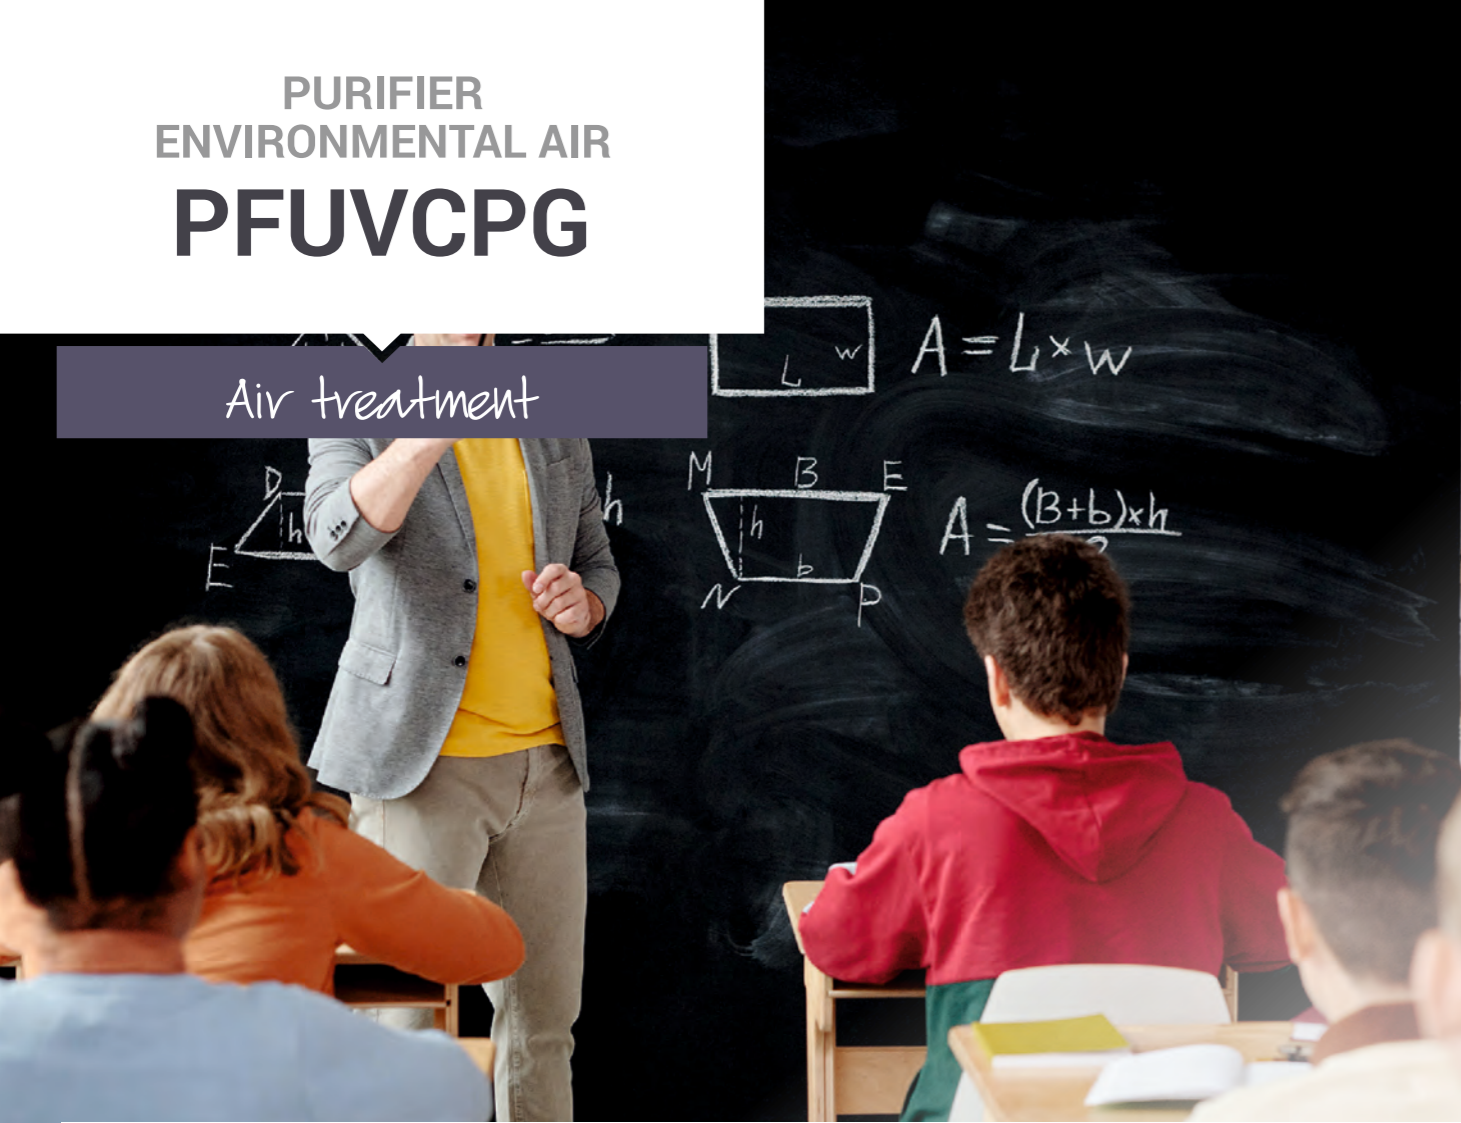

The PG version of the well-known PFUCV model allows a very simple but extremely practical use of the device. Its internal digital hour timer can be programmed for automatic start at selected times as well as set days of the week as well as stop times. In this way, just by feeding 230v the device manages its operation autonomously.

The coating used in this product contains 35% titanium dioxide (TiO₂)



Electronic digital timer with daily and weekly programs. Variety of on / off programs.




EACH PRODUCT INCLUDES 2 ADHESIVES IN SPANISH AND ENGLISH TO STICK AND INFORM THAT A CLASS C ULTRAVIOLET DISINFECTION SYSTEM IS BEING USED



PRODUCTS 100% DESIGNED AND MANUFACTURED IN SPAIN

| Model | PFUVC15BPG | PFUVC15IXPG | PFUVC20BPG | PFUVC20IXPG |
|---|--------------------------------------|-----------------------|------------------------|------------------------|
| Power | 20W | 20W | 25W | 25W |
| Tube wavelength | 254 nm (UVC) (Germicide) | | | |
| Power tube | 15W | 15W | 20W | 20W |
| Disinfection capacity air at 90% | 13,2m ³ /h | 13,2m ³ /h | 15,84m ³ /h | 15,84m ³ /h |
| m2 calculated with a roof 2.5m 90% sterilized | 5,3m ² /h | 5,3m ² /h | 7m ² /h | 7m ² /h |
| Fan capacity | 445m ³ /h | | | |
| Ventilation method | Brushless fan | | | |
| Maximum recommended area per unit | 50m ² | 50m ² | 60m ² | 60m ² |
| Envelope | TIG welded metal | Stainless steel | TIG welded metal | Stainless steel |
| Finish | Oven painted white | AISI304 satin | Oven painted white | AISI304 satin |
| Operating voltage | 230V/50Hz | | | |
| Programmable | Yes | Yes | Yes | Yes |
| Effective against: | Microorganisms, viruses, bacteria... | | | |
| Size | 617x127x62mm | | 767x127x62mm | |

DISINFECTION
EVOLUTION TIME



PFUVC20BPG



PFUVC20IXPG



PFUVC20BPG



PFUVC15IXPG



PFUVC15BPG